



**AC200191**

**AA200510:**

Remote control

**AA210110:**

Active charcoal filter f. recirc. module

**AA211812:**

Recirculation module w.active charcoal

**Canopy extractor 200 series**

86 cm, Stainless steel and glass

**AC200191**

– Can be integrated invisibly in upper cabinet

– Air extraction or air recirculation system

– Energy saving low-noise fan

– Can be integrated invisibly in upper cabinet

Energy-saving, low-noise fan

Rim extraction with flat and easy-to-clean glass underside

Dimmable, neutral white LED light for ideal illumination of the whole cooktop

Air extraction or air recirculation system

#### **Output**

Air extraction:

610 / 800m<sup>3</sup>/h.

64 / 70 dB (A) re 1 pW.

Air recirculation:

540 / 790m<sup>3</sup>/h.

72 / 77 dB (A) re 1 pW.

3 electronically controlled power levels and 1 intensive mode.

#### **Features**

Stainless steel and glass

Remote control is available as a special accessory.

Interval ventilation, 6 min.

Run-on function, 6 min.

Grease filter saturation indicator.

Metal grease filter, dishwasher-safe.

Glass filter cover.

Neutral white LED light (4000 K), dimmable.

Lamp output 2 x 1 W.

Illuminance 266 lx.

Fan technology with highly efficient, brushless DC motor (BLDC).

#### **Consumption data**

Energy consumption 31.4 kWh/year.

Sound level min. 41 dB / max. 64 dB normal mode.

#### **Planning notes**

The equivalent ducting length to ensure good performance is Lmax 19 m.

Clearance above gas appliances min. 65 cm (more than total load gas 12 kW min. 70 cm).

Patented air recirculation module with activated charcoal filter can be installed in the upper cabinet. The activated carbon filter can be changed from the front by simply pulling out the filter drawer.

For air recirculation an external filter module is required.

The door of the upper cabinet must be fully open in order to change the activated charcoal filter.

Can be integrated invisibly in upper cabinet.


Vario cooktops with intensive production of vapours like VR/VP should be placed in the middle beneath the hood (in this case air recirculation is not recommended).

When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.


#### **Connection**

Total connected load 172 W.

Connecting cable 1.0 m with plug.

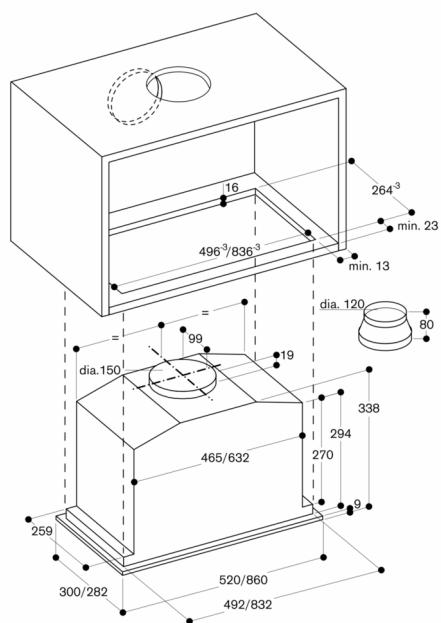

View of upper cabinet from above with AC 200 and AA 211 812

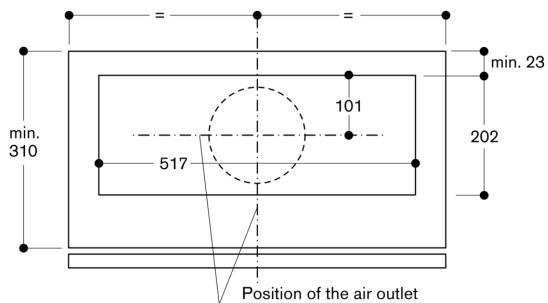

Cross-section of upper cabinet with AC 200 and AA 211 812

