



BMP224110

**Microwave oven 200 series**  
**Door hinge: Right, Gaggenau Metallic**  
**BMP224110**

Flush installation  
Handleless door / automatic door opening  
Single operation and combination of microwave and grill  
Sequential operation of up to 5 modes incl. programming of combined operation and rest time  
TFT touch display  
Electronic temperature control  
Interior volume 21 litres

**Programmes**

Microwave operation with 5 output levels: 900, 600, 360, 180, 90 W.  
Full surface grill with 3 levels of intensity, maximum output 1300 W.  
Full surface grill with microwave output levels 360, 180 and 90 W combinable.  
10 automatic programmes with weight indication:  
3 defrosting programmes 4 cooking programmes 3 combination programmes  
Option to save individual recipes.

**Handling**

Automatic door opening.  
Rotary knob and TFT touch display operation.  
Clear text display.  
Information key with use indicators.  
Side-opening door opens up to 110° angle.

**Features**

Innowave.  
Actual temperature display.  
25 W interior light.  
Hygienic stainless steel interior with glass ceramic base.

**Safety**

Thermally insulated door with double glazing.  
Child lock.  
Safety shut-off.  
Cooled housing with temperature protection.


**Planning notes**

Door hinge not reversible.  
Minimum installation height 85 cm (top edge of niche bottom).  
Height-adjustable feet.  
Installation of BMP above BOP with intermediate shelf.  
Necessary lateral gap between appliance door and furniture panel of min. 5 mm.  
The door panel surface of the appliance extends 21 mm from the furniture cavity.  
When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.

**Connection**


Total connected load 2.0 KW.  
Connection cable 1.7 m, pluggable.

Installation in an upper cabinet

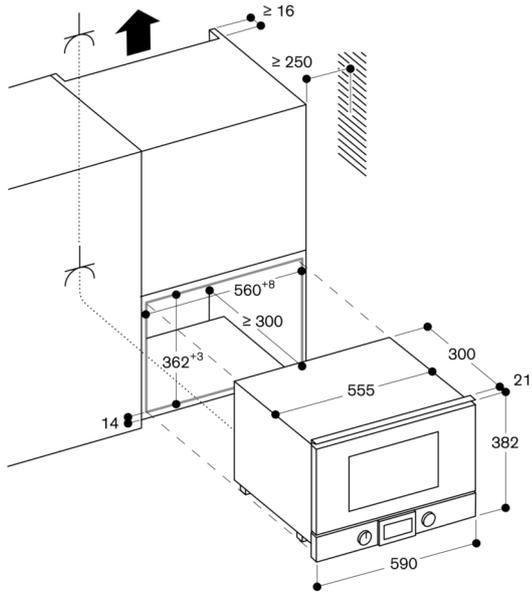

Socket  
measurements in mm

Installation in a tall cupboard

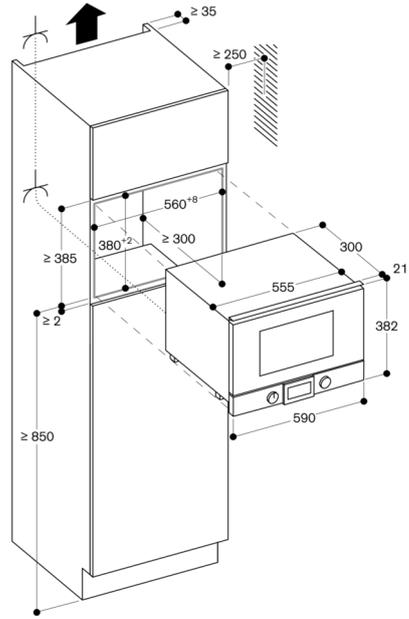

Socket  
measurements in mm

Side view of BMP 224/225 over BOP

