



RY492305



1 x egg box with lid
1 x ice cube scoop

RA430100:
Storage container with lid, anthracite

RA450012:
Water filter Vario 400

RA425910:
Vario SS handle 810 mm

RA428912:
SS doors w/o handle 91,4cm/36" for RY492

RA460000:
Installation kit SxS

RA460013:
Heating side kit 230V

RA460030:
Frontpanel connection for RB

RA464913:
Vent grille 91.4cm/36", filter, RB 492

RA421912:
SS door 91,4cm/36" for RY492

RA423340:
Side trims, 2 pieces, for RB

RA425110:
Vario SS handle 1131 mm

Vario built-in fridge-freezer with freezer at bottom

400 series

212.5 x 90.8 cm, soft close flat hinge

RY492305

Stainless steel interior with solid anthracite aluminium elements

Warm white and glare-free LED light spots

Opening assist for door with two options:

1. Push-to-open function for integration into handleless furniture front
2. Pull-to-open function to facilitate opening the door using a handle

Flat stainless steel inner doors

Smooth design rail system providing flexible positioning for shelves and door racks

Solid anthracite aluminium door racks

One fresh cooling drawer close to 0 °C with manually adjustable temperature and one fresh cooling drawer with manually adjustable humidity

One fresh cooling drawer close to 0 °C with manually adjustable temperature and one fresh cooling drawer with manually adjustable humidity

Integrated ice maker with fixed inlet water connection

1 asymmetrically split glass shelf, height adjustable

Fully extendable freezer drawer with practical divider in anthracite

Fully extendable freezer drawer with practical divider in anthracite

TFT touch display

Handling

TFT touch display operation.

Clear text display.

Features

Dynamic cold air distribution.

Automatic defrosting with defrost water evaporation.

Cushioned door closing system.

Activated charcoal air filter.

Rest mode certified by Star-K.

When rest mode is active, the appliance can only be opened using a handle.

Open-door and malfunction system.

Integrated WiFi module for digital services (Home Connect).

The availability of the Home Connect functionality depends on the availability of the Home Connect Services in your country. Home Connect Services are not available in every country – for further information please check: www.home-connect.com

Cooling

No-frost technology with fast cooling.

Temperature adjustable from +2 °C to +8 °C.

1 asymmetrically split safety glass shelf, manually adjustable.

4 brilliant LED light spots with warm white, glare-free light within cooling area and drawers.

Smooth design door rail system with fully flexible positioning of door racks.

6 height-adjustable door racks, 2 of which are extra deep.

Fresh cooling close to 0 °C

1 fully extendable fresh cooling drawer close to

0 °C with transparent front, illuminated.

1 fully extendable fresh cooling drawer close to 0 °C with transparent front, illuminated.

Cushioned closing system.

Cushioned closing system.

Temperature can be adjusted manually.

Temperature can be adjusted manually.

Ideal for meat, fish and poultry.

Fresh cooling

1 fully extendable fresh cooling drawer with transparent front, illuminated.

Cushioned closing system.

Humidity can be adjusted manually.

Ideal for fruit and vegetables.

Freezing

No-frost technology with fast freezing at -30 °C.

Temperature adjustable from -14 °C to -24 °C.

4-star freezer compartment.

2 fully extendable inside drawers.

2 fully extendable inside drawers.

Interior lighting with 2 LED light spots, warm white light.

Interior lighting with 2 LED light spots, warm white light.

Ice maker

Integrated in the freezer compartment, with fixed inlet water connection.

Particle filter for water inlet, integrated in ventilation grille area.

Saturation indicator shown in TFT touch display. Can be switched off.

Ice cube production approx. 1.5 kg/24h.

Removable ice storage container with approx. 4.4 kg capacity.

Product rating

Planning notes

Flat hinge.

Door opening angle of 115°, fixable at 90°.

Max. door panel weight 41kg

Shut-off valve for water connection must be planned next to the appliance and always be accessible.

If the water pressure exceeds 0.8 MPa (8 bar), connect pressure relief valve between water tap and hose set.

Connection

Total connected load 0.300 KW.


Connecting cable 3.0 m, pluggable.

Water inlet.


Supply hose 2.0 m with 3/4" connection.

Water pressure 2.4 to 6.9 bar.

Door opening angle

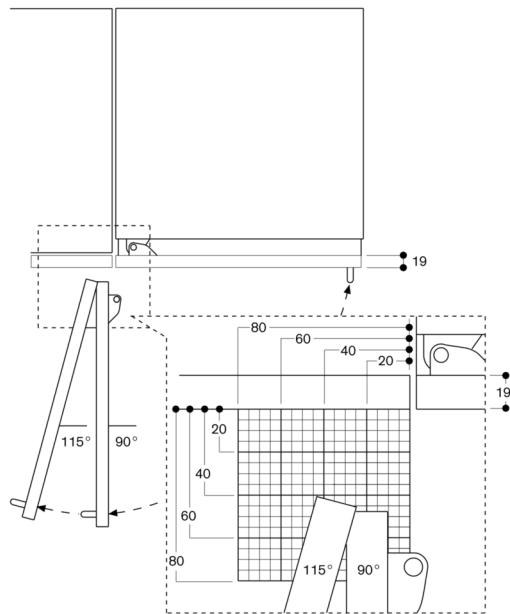


The hinge travel and resulting clearances from adjacent furniture units and handles can be found from the drawing while allowing for the thickness of the front panel. In the drawing, a furniture unit front panel thickness of 19 mm was assumed.

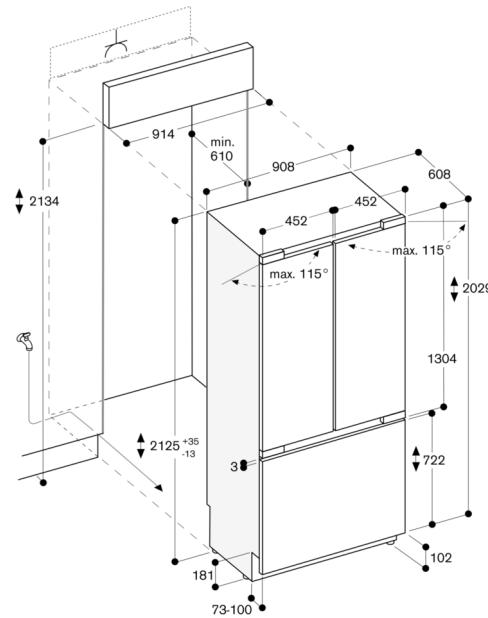

The maximum door panel dimensions are based on a clearance of 3 mm.

Base detail

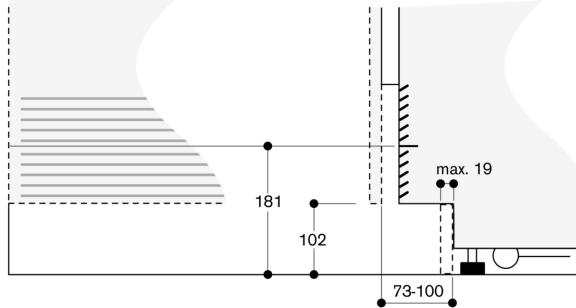

Based on the standard appliance height, the height of the plinth is 102 mm. Maximum plinth thickness 19 mm.

